XC9244/XC9245 Series

ETR05020-007

400mA Synchronous Step-Down DC/DC Converters

☆GreenOperation Compatible

■GENERAL DESCRIPTION

The XC9244/XC9245 series is a group of synchronous-rectification type step-down DC/DC converters with a built-in 0.65Ω P-channel MOS driver transistor and 0.45Ω N-channel MOS switching transistor, designed to allow the use of ceramic capacitors. Output current of 400mA (MAX.) to be configured using only a coil and capacitor connected externally.

The output voltage can be set from 0.8V to 4.0V in increments of 0.05V (accuracy: ±2.0%). With an internal switching frequency of 1.2MHz, small external components can be used. USPN-6 package is suitable for the application which requires low profile and small-footprint.

The XC9244 series is PWM fixed frequency control, and the XC9245 series is PWM/PFM, which automatically switches from PWM to PFM during light loads, high efficiency can be achieved over a wide range of load conditions. When stand-by mode, due to stop all operation, supply current is reduced to 1 μA or less. The integrated C_L discharge function which enables the electric charge at the output capacitor C_L to be discharged via the internal discharge switch located between the V_{OUT} and V_{SS} pins. The C_L discharge function prevents malfunction on V_{OUT} connecting application during stand-by mode.

The XC9244/XC9245 series has a high speed soft-start as fast as 0.25ms in typical for quick turn-on. Current limiter circuit (Constant Current & Latching) is built-in for preventing from thermal destruction. With UVLO (Under Voltage Lock Out) function, the internal P channel driver transistor is forced OFF when input voltage becomes 2.25V or lower.

■APPLICATIONS

- ●Smart phones / Mobile phones
- ●Bluetooth
- ●Mobile devices / terminals
- ●Portable game consoles
- ●Digital still cameras / Camcorders
- ●Note PCs / Tablet PCs

■FEATURES

Driver Transistor Built-In	:	0.65Ω P-ch Driver Transistor 0.45Ω N-ch Synchronous Switch Transistor
Input Voltage	:	2.3V ~ 6.0V
Output Voltage Selectable	:	0.8V ~ 4.0V (0.05V Increments)
High Efficiency	:	90% (TYP.)*
Output Current	:	400mA
Oscillation Frequency	:	1.2MHz ±15%
Maximum Duty Cycle	:	100%
Function	:	Current Limiter Circuit (Constant Current & Latching) C_L High Speed Discharge Soft Start Circuit
Capacitor	:	Low ESR Ceramic Capacitor
Control Methods	:	PWM (XC9244) PWM/PFM Auto (XC9245)
Operating Ambient Temperature	:	-40℃ ~ 85℃
Package	:	USPN-6
Environmentally Friendly	:	EU RoHS Compliant, Pb Free

* The characteristics change with external parts, substrate wiring, etc.

■TYPICAL APPLICATION CIRCUIT

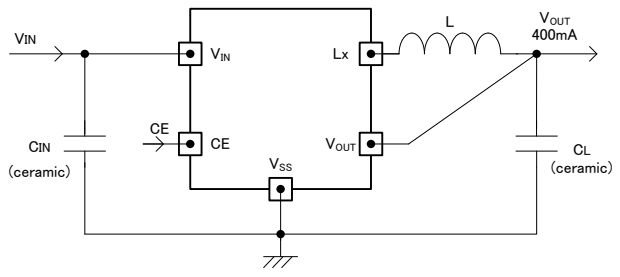

■TYPICAL PERFORMANCE CHARACTERISTICS

XC9244/XC9245A33C

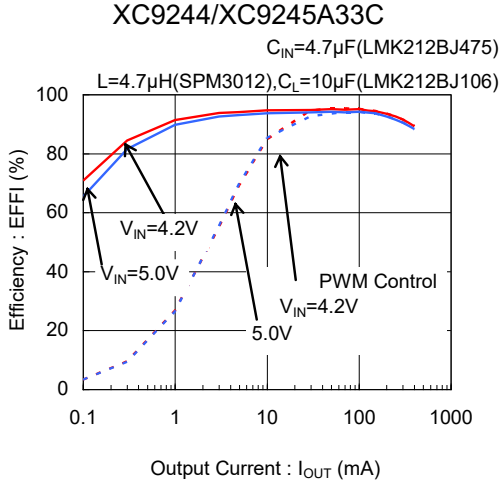

■BLOCK DIAGRAM

XC9244/XC9245 Series, Type A

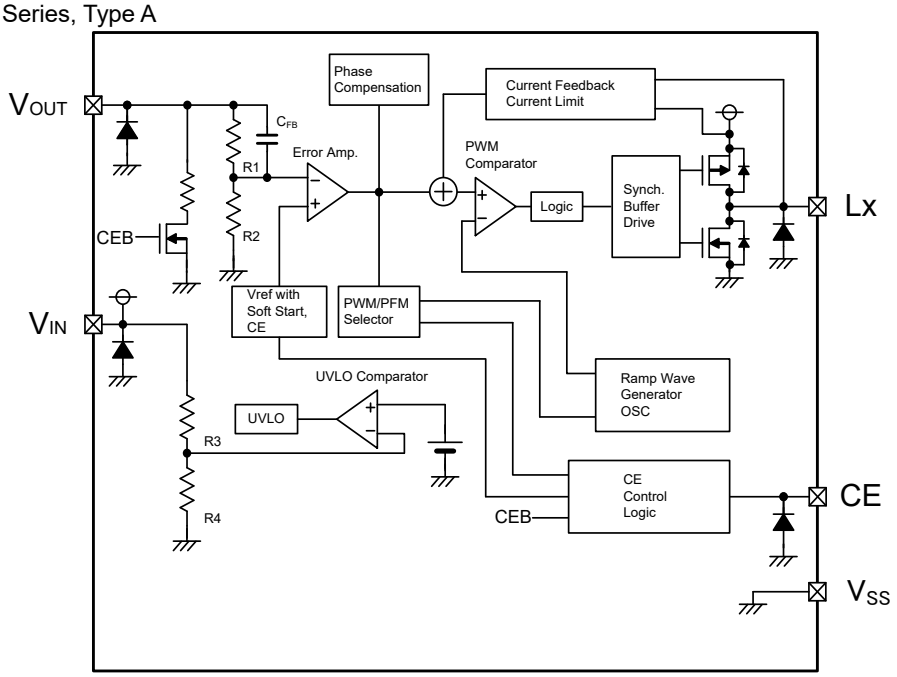

■PRODUCT CLASSIFICATION

●Ordering Information

XC9244①②③④⑤⑥-⑦ Fixed PWM control

XC9245①②③④⑤⑥-⑦ PWM / PFM automatic switching control

DESIGNATOR	ITEM	SYMBOL	DESCRIPTION
①	Type	A	Refer to Selection Guide
②③	Output Voltage	08~40	Output voltage options e.g. 1.2V → ②=1, ③=2 1.25V → ②=1, ③=C 0.05V increments: 0.05=A, 0.15=B, 0.25=C, 0.35=D, 0.45=E, 0.55=F, 0.65=H, 0.75=K, 0.85=L, 0.95=M Refer to “Stadard Voltage”
④	Oscillation Frequency	C	1.2MHz
⑤⑥-⑦ (*1)	Package (Order Unit)	7R-G	USPN-6 (5,000/Reel)

(*1) The “-G” suffix denotes Halogen and Antimony free as well as being fully EU RoHS compliant.

Selection Guide

TYPE	OUTPUT VOLTAGE	C_L AUTO-DISCHARGE	LATCH	UVLO	CHIP ENABLE	CURRENT LIMIT	SOFT-START TIME
A	Fixed	Yes	Yes	Yes	Yes	Yes	Fixed

V_{OUT}(V)	PRODUCT NAME	
	Fixed PWM	PWM/PFM Auto
1.0V	XC9244A10C7R-G	XC9245A10C7R-G
1.2V	XC9244A12C7R-G	XC9245A12C7R-G
1.5V	XC9244A15C7R-G	XC9245A15C7R-G
1.8V	XC9244A18C7R-G	XC9245A18C7R-G
2.5V	XC9244A25C7R-G	XC9245A25C7R-G
2.8V	XC9244A28C7R-G	XC9245A28C7R-G
3.3V	XC9244A33C7R-G	XC9245A33C7R-G

*For other voltages, please contact your local Torex sales office or representative.

■PIN CONFIGURATION



USPN-6
(BOTTOM VIEW)

*If the pad needs to be connected to other pins, it should be connected to the VSS (No. 2 and 6) pin.

■PIN ASSIGNMENT

PIN NUMBER USPN-6	PIN NAME	FUNCTION
4	V_{IN}	Power Input
2, 6	V_{SS}	Ground
3	CE	Chip Enable
1	V_{OUT}	Output Voltage Monitor
5	L_X	Switching Output

■FUNCTION

XC9244/XC9245 Series, Type A

PIN NAME	SIGNAL	STATUS
CE	L	Stand-by
	H	Active

* Please do not leave the CE pin open.

■ABSOLUTE MAXIMUM RATINGS

Ta=25℃

PARAMETER		SYMBOL	RATINGS	UNITS
V_{IN} Pin Voltage		V_{IN}	-0.3 ~ 6.5	V
Lx Pin Voltage		V_{Lx}	-0.3 ~ V_{IN}+0.3 or 6.5 (*1)	V
V_{OUT} Pin Voltage		V_{OUT}	-0.3 ~ V_{IN}+0.3 or 6.5 (*1)	V
CE Pin Voltage		V_{CE}	-0.3 ~ 6.5	V
Lx Pin Current		I_{Lx}	±1500	mA
Power Dissipation	USPN-6	Pd	100	mW
Operating Ambient Temperature		Topr	-40 ~ 85	℃
Storage Temperature		Tstg	-55 ~ 125	℃

* All voltages are described based on the V_{SS} pin.

(*1) The maximum value should be either V_{IN}+0.3V or 6.5V in the lowest.

■ELECTRICAL CHARACTERISTICS

XC9244/XC9245 Ta=25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Output Voltage	V_{OUT}	When connected to external components, V_{IN}=V_{CE}=5.0V, I_{OUT}=30mA	<E-1>	<E-2>	<E-3>	V	①
Operating Voltage Range	V_{IN}		2.3	-	6.0	V	①
Maximum Output Current	I_{OUTMAX}	When connected to external components (*1), V_{IN}=V_{CE}=$V_{OUT(E)}$+2.0V,	400	-	-	mA	①
UVLO Voltage	V_{UVLO}	V_{IN}=V_{CE}, V_{OUT}=0V, Voltage which Lx pin holding "L" level (*2,*9)	1.60	1.90	2.25	V	③
Quiescent Current	Iq	V_{IN}=V_{CE}=5.0V, V_{OUT}=$V_{OUT(E)}$ × 1.1	-	18	30	μA	②
Stand-by Current	I_{STB}	V_{IN}=5.0V, V_{CE}=0V, V_{OUT}=0V	-	0.0	1.0	μA	②
Oscillation Frequency	f_{OSC}	When connected to external components, V_{IN}=V_{CE}=5.0V, I_{OUT}=200mA	1020	1200	1380	kHz	①
PFM Switch Current (*3)	I_{PFM}	When connected to external components, V_{IN}=V_{CE} = (C-1) , I_{OUT}=1mA	125	180	235	mA	①
PFM Duty Limit (*3)	DTY_{LIMIT_PFM}	V_{IN}=V_{CE}= (C-2), I_{OUT}=1mA	-	-	300	%	①
Maximum Duty Cycle	D_{MAX}	V_{IN}=V_{CE} =5.0V, V_{OUT}=$V_{OUT(E)}$ × 0.9	100	-	-	%	③
Minimum Duty Cycle	D_{MIN}	V_{IN}=V_{CE}=5.0V, V_{OUT}=$V_{OUT(E)}$ × 1.1	-	-	0	%	③
Efficiency	EFFI	When connected to external components, V_{IN}=V_{CE}=$V_{OUT(E)}$ +1.5V, I_{OUT} =100mA (*4)	-	<E-4>	-	%	①
Lx SW"H"ON Resistance	R_{LXH}	V_{IN}=V_{CE}=5.0V, V_{OUT}=0V, I_{LX}=100mA (*5)	-	0.65	0.85	Ω	④
Lx SW"L"ON Resistance	R_{LXL}	V_{IN}=V_{CE}=5.0V	-	0.45(*6)	0.65(*6)	Ω	-
Lx SW"H" Leakage Current (*7)	I_{LeakH}	V_{IN}=V_{OUT}=5.0V, V_{CE}=0V, V_{LX}=0V	-	0.00	1.00	μA	⑤
Lx SW"L" Leakage Current (*7)	I_{LeakL}	V_{IN}=V_{OUT}=5.0V, V_{CE}=0V, V_{LX}=5.0V	-	0.00	1.00	μA	⑤
Current Limit (*8)	I_{LIM}	V_{IN}=V_{CE}=5.0V, V_{OUT}=$V_{OUT(E)}$ ×0.9	700	900	1200	mA	⑥
Output Voltage Temperature Characteristics	ΔV_{OUT}/ (V_{OUT}・ΔTopr)	I_{OUT}=30mA, -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
CE "H" Voltage	V_{CEH}	V_{IN}=5.0V, V_{OUT}=0V, Applied voltage to V_{CE}, Voltage changes Lx to "H" level (*9)	1.20	-	6.00	V	③
CE "L" Voltage	V_{CEL}	V_{IN}=5.0V, V_{OUT}=0V, Applied voltage to V_{CE}, Voltage changes Lx to "L" level (*9)	V_{SS}	-	0.25	V	③
CE "H" Current	I_{CEH}	V_{IN}=5.0V, V_{CE}=5.0V, V_{OUT}=0V	-0.1	-	0.1	μA	⑤
CE "L" Current	I_{CEL}	V_{IN}=5.0V, V_{CE}=0V, V_{OUT}=0V	-0.1	-	0.1	μA	⑤
Soft-Start Time	t_{SS}	When connected to external components, V_{IN}=5.0V, V_{CE}=0V → 5.0V, I_{OUT}=1mA	-	0.25	-	ms	①
Latch Time	t_{LAT}	V_{IN}=V_{CE}=5.0V, V_{OUT}=0.8×$V_{OUT(E)}$, Short Lx at 1Ω resistance (*10)	0.50	1.00	5.00	ms	⑦
C_L Discharge	R_{DCHG}	V_{IN}=5.0V, V_{CE}=0V, V_{OUT}=5.0V	50	120	200	Ω	⑧

NOTE:
Unless otherwise stated, V_{IN}=5.0V, $V_{OUT(E)}$=Nominal Voltage
(*1) When the difference between the input and the output is small, some cycles may be skipped completely before current maximizes. If current is further pulled from this state, output voltage will decrease because of P-ch driver ON resistance.
(*2) Including UVLO detect voltage, hysteresis operating voltage range for UVLO release voltage. UVLO release voltage is V_{IN} voltage which is Lx pin becomes "H".
(*3) XC9244 series exclude I_{PFM} and DTY_{LIMIT_PFM} because those are only for the PFM control's functions.
(*4) EFFI = { (output voltage × output current) ／ (input voltage × input current) } × 100
(*5) ON resistance= (V_{IN} - Lx pin measurement voltage) / 100mA
(*6) Design value
(*7) When temperature is high, a current of approximately 10μA (maximum) may leak.
(*8) Current limit denotes the level of detection at peak of coil current.
(*9) "H"＝V_{IN}~V_{IN} - 1.2V, "L"＝+ 0.1V ~ - 0.1V
(*10) Time until it short-circuits V_{OUT} with GND via 1Ω of resistor from an operational state and is set to Lx=0V from current limit pulse generating.

■ELECTRICAL CHARACTERISTICS (Continued)

SPEC Table

1) I_{PFM},DTY_{LIMIT_PFM},V_{OUT},EFFI

NOMINAL OUTPUT VOLTAGE	I_{PFM}	DTY_{LIMIT_PFM}	V_{OUT}			EFFI (TYP.)
	<C-1>	<C-2>	<E-1>	<E-2>	<E-3>	<E-4>
$V_{OUT(E)}$			MIN.	TYP.	MAX.	
0.80	3.6V	2.3V	0.784	0.800	0.816	77
0.85			0.833	0.850	0.867	78
0.90			0.882	0.900	0.918	79
0.95			0.931	0.950	0.969	80
1.00			0.980	1.000	1.020	81
1.05			1.029	1.050	1.071	82
1.10			1.078	1.100	1.122	83
1.15			1.127	1.150	1.173	84
1.20			1.176	1.200	1.224	85
1.25			1.225	1.250	1.275	85
1.30			1.274	1.300	1.326	86
1.35			1.323	1.350	1.377	86
1.40			1.372	1.400	1.428	86
1.45			1.421	1.450	1.479	86
1.50			1.470	1.500	1.530	87
1.55			1.519	1.550	1.581	87
1.60			1.568	1.600	1.632	87
1.65	$V_{OUT(E)}$+2.0V		1.617	1.650	1.683	87
1.70			1.666	1.700	1.734	88
1.75			1.715	1.750	1.785	88
1.80		$V_{OUT(E)}$+0.5V	1.764	1.800	1.836	88
1.85			1.813	1.850	1.887	88
1.90			1.862	1.900	1.938	89
1.95			1.911	1.950	1.989	89
2.00			1.960	2.000	2.040	89
2.05			2.009	2.050	2.091	89
2.10			2.058	2.100	2.142	89
2.15			2.107	2.150	2.193	90
2.20			2.156	2.200	2.244	90
2.25			2.205	2.250	2.295	90
2.30			2.254	2.300	2.346	90
2.35			2.303	2.350	2.397	90
2.40			2.352	2.400	2.448	91
2.45			2.401	2.450	2.499	91
2.50			2.450	2.500	2.550	91
2.55			2.499	2.550	2.601	91
2.60			2.548	2.600	2.652	91
2.65			2.597	2.650	2.703	91
2.70			2.646	2.700	2.754	92

■ELECTRICAL CHARACTERISTICS (Continued)

SPEC Table

1) I_{PFM},DTY_{LIMIT_PFM},V_{OUT},EFFI

NOMINAL OUTPUT VOLTAGE	I_{PFM}	DTY_{LIMIT_PFM}	V_{OUT}			EFFI (TYP.)
	<C-1>	<C-2>	<E-1>	<E-2>	<E-3>	<E-4>
$V_{OUT(E)}$			MIN.	TYP.	MAX.	
2.75	$V_{OUT(E)}$+2.0V	$V_{OUT(E)}$+0.5V	2.695	2.750	2.805	92
2.80			2.744	2.800	2.856	92
2.85			2.793	2.850	2.907	92
2.90			2.842	2.900	2.958	92
2.95			2.891	2.950	3.009	92
3.00			2.940	3.000	3.060	92
3.05			2.989	3.050	3.111	92
3.10			3.038	3.100	3.162	93
3.15			3.087	3.150	3.213	93
3.20			3.136	3.200	3.264	93
3.25			3.185	3.250	3.315	93
3.30			3.234	3.300	3.366	93
3.35			3.283	3.350	3.417	93
3.40			3.332	3.400	3.468	93
3.45			3.381	3.450	3.519	93
3.50			3.430	3.500	3.570	93
3.55			3.479	3.550	3.621	93
3.60			3.528	3.600	3.672	93
3.65			3.577	3.650	3.723	93
3.70			3.626	3.700	3.774	93
3.75			3.675	3.750	3.825	94
3.80			3.724	3.800	3.876	94
3.85			3.773	3.850	3.927	94
3.90			3.822	3.900	3.978	94
3.95			3.871	3.950	4.029	94
4.00			3.920	4.000	4.080	94

■TYPICAL APPLICATION CIRCUIT

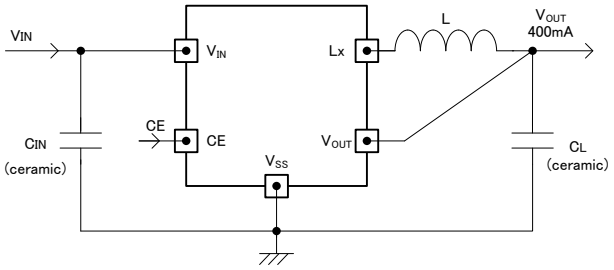

●External Components

	MANUFACTURE	PRODUCT NUMBER	RATED VOLTAGE / INDUCTANCE	DIMENTION (mm)
L	TDK	SPM3012-4R7	4.7μH	3.2 x 3.0 x h1.2
	TAIYO YUDEN	NR3015-4R7	4.7μH	3.0 x 3.0 x h1.5
	Coilcraft	EPL3015-4R7	4.7μH	3.2 x 3.2 x h1.55
C_{IN}	TAIYO YUDEN	LMK212ABJ475KG	10V / 4.7μF	2.0 x 1.25 x h1.4
	KYOCERA	CM105X5R475K10A	10V / 4.7μF	1.6 x 0.8 x h1.0
C_L	TAIYO YUDEN	LMK212ABJ106KG	10V / 10μF	2.0 x 1.25 x h1.4
	KYOCERA	CM105X5R106M10A	10V / 10μF	1.6 x 0.8 x h1.0

■OPERATIONAL DESCRIPTION

The XC9244/XC9245 series consists of a reference voltage source, ramp wave circuit, error amplifier, PWM comparator, phase compensation circuit, output voltage adjustment resistors, P-channel MOS driver transistor, N-channel MOS switching transistor for the synchronous switch, current limiter circuit, UVLO circuit and others. (See the block diagram below.)

The series ICs compare, using the error amplifier, the voltage of the internal voltage reference source with the feedback voltage from the V_{OUT} pin through split resistors, R1 and R2. Phase compensation is performed on the resulting error amplifier output, to input a signal to the PWM comparator to determine the turn-on time during PWM operation. The PWM comparator compares, in terms of voltage level, the signal from the error amplifier with the ramp wave from the ramp wave circuit, and delivers the resulting output to the buffer driver circuit to cause the Lx pin to output a switching duty cycle. This process is continuously performed to ensure stable output voltage. The current feedback circuit monitors the P-channel MOS driver transistor current for each switching operation, and modulates the error amplifier output signal to provide multiple feedback signals. This enables a stable feedback loop even when a low ESR capacitor such as a ceramic capacitor is used ensuring stable output voltage.

XC9244/XC9245 Series, Type A

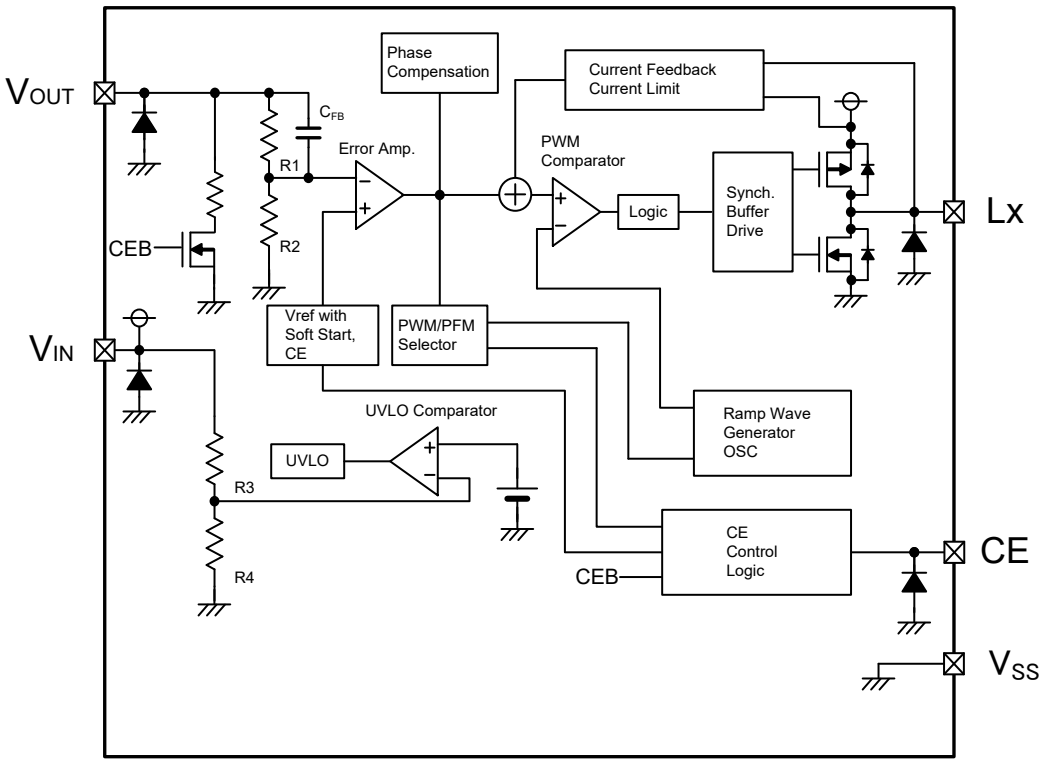

<Reference Voltage Source>

The reference voltage source provides the reference voltage to ensure stable output voltage of the DC/DC converter.

<Ramp Wave Circuit>

The ramp wave circuit determines switching frequency. The frequency is fixed internally as1.2MHz. Clock pulses generated in this circuit are used to produce ramp waveforms needed for PWM operation, and to synchronize all the internal circuits.

<Error Amplifier>

The error amplifier is designed to monitor output voltage. The amplifier compares the reference voltage with the feedback voltage divided by the internal split resistors, R1 and R2. When a voltage lower than the reference voltage is fed back, the output voltage of the error amplifier increases. The gain and frequency characteristics of the error amplifier output are fixed internally to deliver an optimized signal to the mixer.

The error amplifier output signal optimized in the mixer is modulated with the current feedback signal. This signal is delivered to the PWM compatator.

■OPERATIONAL DESCRIPTION (Continued)

<Current Limit>

The current limiter circuit of the XC9244/XC9245 series monitors the current flowing through the P-channel MOS driver transistor connected to the Lx pin, and features a combination of the current limit mode and the operation suspension mode.

① When the driver current is greater than a specific level, the current limit function operates to turn off the pulses from the Lx pin at any given timing.
② When the P-channel MOS driver transistor is turned off, the limiter circuit is then released from the current limit detection state.
③ At the next pulse, the P-channel MOS driver transistor is turned on. However, the P-channel MOS driver transistor is immediately turned off in the case of an over current state.
④ When the over current state is eliminated, the IC resumes its normal operation.

The IC waits for the over current state to end by repeating the steps ① through ③. If an over current state continues for a few ms and the above three steps are repeatedly performed, the IC performs the function of latching the OFF state of the P-channel MOS driver transistor, and goes into operation suspension mode. Once the IC is in suspension mode, operations can be resumed by either turning the IC off via the CE/MODE pin, or by restoring power to the V_{IN} pin. The suspension mode does not mean a complete shutdown, but a state in which pulse output is suspended; therefore, the internal circuitry remains in operation. The current limit of the XC9244/XC9245 series can be set at 900mA at typical. Besides, care must be taken when laying out the PC Board, in order to prevent misoperation of the current limit mode. Depending on the state of the PC Board, latch time may become longer and latch operation may not work. In order to avoid the effect of noise, the board should be laid out so that input capacitors are placed as close to the IC as possible.

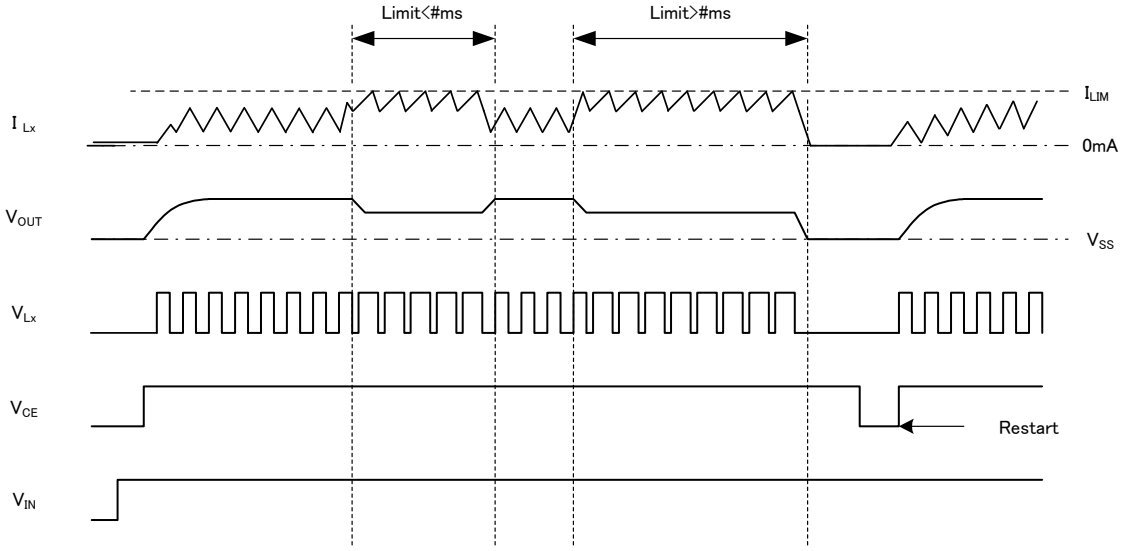

<UVLO Circuit>

When the V_{IN} voltage becomes 1.6V or lower, the P-ch MOS driver transistor output driver transistor is forced OFF to prevent false pulse output caused by unstable operation of the internal circuitry. When the V_{IN} pin voltage becomes 2.25V or higher, switching operation takes place. By releasing the UVLO function, the IC performs the soft start function to initiate output startup operation. The soft start function operates even when the V_{IN} pin voltage falls momentarily below the UVLO operating voltage. The UVLO circuit does not cause a complete shutdown of the IC, but causes pulse output to be suspended; therefore, the internal circuitry remains in operation.

<PFM Switch Current> (*1)

In PFM control operation, until coil current reaches to a specified level (I_{PFM}), the IC keeps the P-ch MOS driver transistor on. In this case, time that the P-ch MOS driver transistor is kept on (t_{ON}) can be given by the following formula.

$$t_{ON} = L \times I_{PFM} / (V_{IN} - V_{OUT}) \rightarrow I_{PFM}①$$

< PFM Duty Limit > (*1)

In PFM control operation, the PFM duty limit (DTY_{LIMIT_PFM}) is set to 300% (MAX.).
Therefore, under the condition that the duty increases (e.g. the condition that the step-down ratio is small), it's possible for P-ch MOS driver transistor to be turned off even when coil current doesn't reach to I_{PFM}. $\rightarrow I_{PFM}②$

(* 1) XC9244 series exclude.

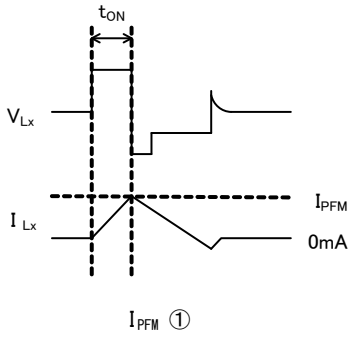

I_{PFM} ①

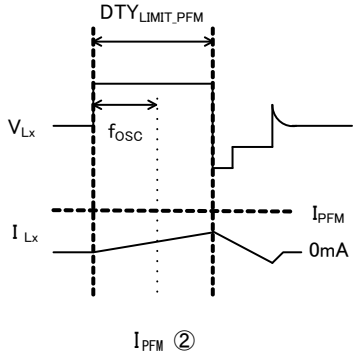

I_{PFM} ②

■OPERATIONAL DESCRIPTION (Continued)

<C_L High Speed Discharge>

XC9244/ XC9245 series can quickly discharge the electric charge at the output capacitor (C_L) when a low signal to the CE pin which enables a whole IC circuit put into OFF state, is inputted via the N-ch MOS switch transistor located between the V_{OUT} pin and the V_{SS} pin. When the IC is disabled, electric charge at the output capacitor (C_L) is quickly discharged so that it may avoid application malfunction. Discharge time of the output capacitor (C_L) is set by the C_L auto-discharge resistance (R) and the output capacitor (C_L). By setting time constant of a C_L auto-discharge resistance value [R_{DCHG}] and an output capacitor value (C_L) as τ ($\tau = C_L \times R_{DCHG}$), discharge time of the output voltage after discharge via the N-channel transistor is calculated by the following formulas.

$V = V_{OUT(E)} \times e^{-t/\tau}$ or $t = \tau \ln (V_{OUT(E)} / V)$

V: Output voltage after discharge

$V_{OUT(E)}$: Output voltage

t: Discharge time

τ : $C_L \times R_{DCHG}$

C_L: Capacitance of Output capacitor

R_{DCHG}: C_L auto-discharge resistance

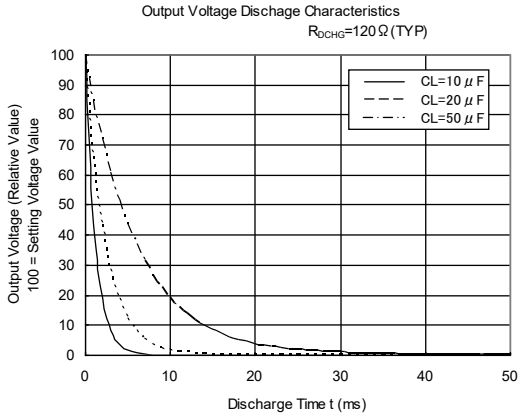

<CE Pin Function>

The operation of the XC9244/XC9245 series will enter into the shut down mode when a low level signal is input to the CE pin. During the shutdown mode, the current consumption of the IC becomes 0μA (TYP.), with a state of high impedance at the Lx pin and C_L high speed discharge at V_{OUT} pin. The IC starts its operation by inputting a high level signal to the CE pin. The input to the CE pin is a CMOS input and the sink current is 0μA (TYP.).

1) XC9244/XC9245 series - Examples of how to use CE pin

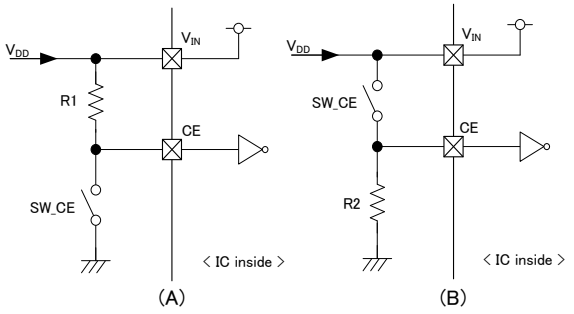

(A)

SW_CE	STATUS
ON	Stand-by
OFF	Operation

(B)

SW_CE	STATUS
ON	Stand-by
OFF	Operation

<Soft Start>

The XC9244/ XC9245 series provide 0.25ms (TYP). Soft start time is defined as the time interval to reach 90% of the output voltage from the time when the V_{CE} is turned on.

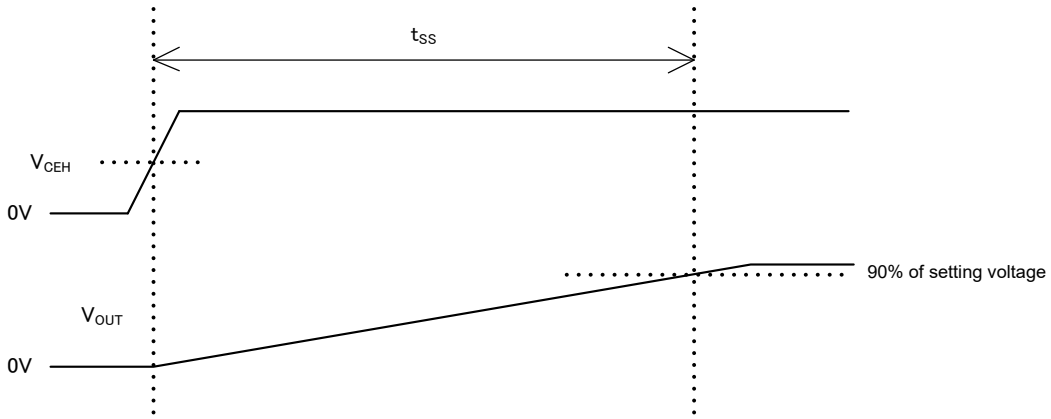

■NOTE ON USE

1. Please use this IC within the stated maximum ratings. For temporary, transitional voltage drop or voltage rising phenomenon, the IC is liable to malfunction should the ratings be exceeded.

2. Spike noise and ripple voltage arise in a switching regulator as with a DC/DC converter. These are greatly influenced by external component selection, such as the coil inductance, capacitance values, and board layout of external components. Once the design has been completed, verification with actual components should be done.

3. When the difference between V_{IN} and V_{OUT} is large in PWM control, very narrow pulses will be outputted, and there is the possibility that some cycles may be skipped completely.

4. When the difference between V_{IN} and V_{OUT} is small, and the load current is heavy, very wide pulses will be outputted and there is the possibility that some cycles may be skipped completely.

V_{OUT}: 100mV/div
I_{Lx}: 100mA/div
V_{Lx}: 5V/div

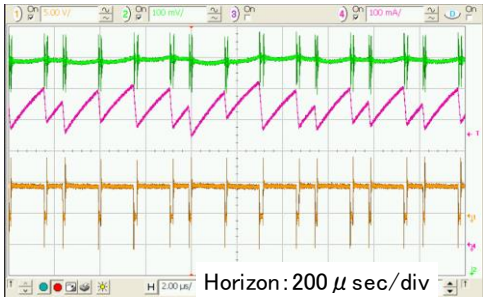

5. With the IC, the peak current of the coil is controlled by the current limit circuit. Since the peak current increases when dropout voltage or load current is high, current limit starts operation, and this can lead to instability. When peak current becomes high, please adjust the coil inductance value and fully check the circuit operation. In addition, please calculate the peak current according to the following formula:

$$Ipk = (V_{IN} - V_{OUT}) \times OnDuty / (2 \times L \times f_{OSC}) + I_{OUT}$$

L: Coil Inductance Value
f_{OSC}: Oscillation Frequency

6. When the peak current which exceeds limit current flows within the specified time, the built-in P-ch MOS driver transistor turns off. During the time until it detects limit current and before the built-in transistor can be turned off, the current for limit current flows; therefore, care must be taken when selecting the rating for the external components such as a coil.

7. Care must be taken when laying out the PC Board, in order to prevent misoperation of the current limit mode. Depending on the state of the PC Board, latch time may become longer and latch operation may not work. In order to avoid the effect of noise, the board should be laid out so that input capacitors are placed as close to the IC as possible.

8. Please do not use the IC at voltages below the recommended voltage range.

9. This IC should be used within the stated absolute maximum ratings in order to prevent damage to the device.

10. When the IC is used in high temperature, output voltage may increase up to input voltage level at no load because of the leak current of the driver transistor.

11. The current limit is set to 1200mA (MAX.) at typical. However, the current of 1200mA or more may flow. In case that the current limit functions while the V_{OUT} pin is shorted to the GND pin, when P-ch MOS driver transistor is ON, the potential difference for input voltage will occur at both ends of a coil. For this, the time rate of coil current becomes large. By contrast, when N-ch MOS driver transistor is ON, there is almost no potential difference at both ends of the coil since the V_{OUT} pin is shorted to the GND pin. Consequently, the time rate of coil current becomes quite small. According to the repetition of this operation, and the delay time of the circuit, coil current will be converged on a certain current value, exceeding the amount of current, which is supposed to be limited originally. Even in this case, however, after the over current state continues for several ms, the circuit will be latched. A coil should be used within the stated absolute maximum rating in order to prevent damage to the device.

①Current flows into P-ch MOS driver transistor to reach the current limit (I_{LIM}).
②The current of I_{LIM} or more flows since the delay time of the circuit occurs during from the detection of the current limit to OFF of P-ch MOS driver transistor.
③Because of no potential difference at both ends of the coil, the time rate of coil current becomes quite small.
④Lx oscillates very narrow pulses by the current limit for several ms.
⑤The circuit is latched, stopping its operation.

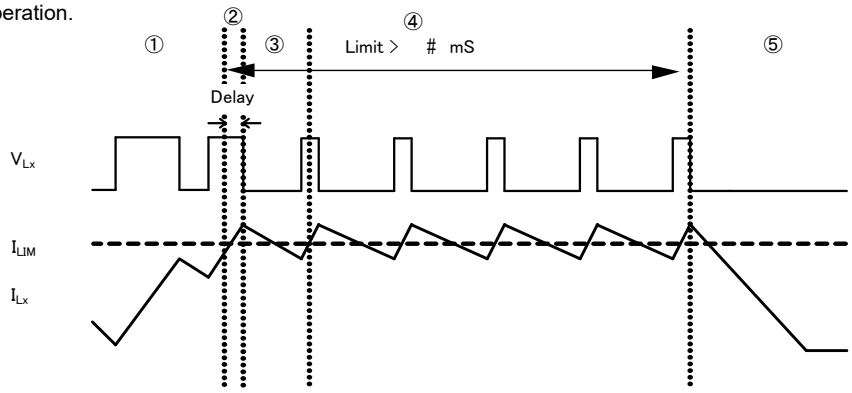

■NOTE ON USE (Continued)

12. In order to stabilize V_{IN}'s voltage level, we recommend that a by-pass capacitor (C_{IN}) be connected as close as possible to the V_{IN} & V_{SS} pins.

13. In case of V_{IN}＜2.5V, the maximum load current may be decreased less than 400mA due to the characteristics of current limit.

14. Torex places an importance on improving our products and their reliability.
We request that users incorporate fail-safe designs and post-aging protection treatment when using Torex products in their systems.

●Instructions of pattern layouts

1. In order to stabilize V_{IN} voltage level, we recommend that a by-pass capacitor (C_{IN}) be connected as close as possible to the V_{IN} & V_{SS} pins.
2. Please mount each external component as close to the IC as possible.
3. Wire external components as close to the IC as possible and use thick, short connecting traces to reduce the circuit impedance.
4. Make sure that the PCB GND traces are as thick as possible, as variations in ground potential caused by high ground currents at the time of switching may result in instability of the IC.
5. This series' internal P-ch driver transistors bring on heat because of the output current and ON resistance of driver transistors.

●Recommended Pattern Layout

1st Layer



2nd Layer



PCB



■TEST CIRCUITS

< Circuit No.1 >

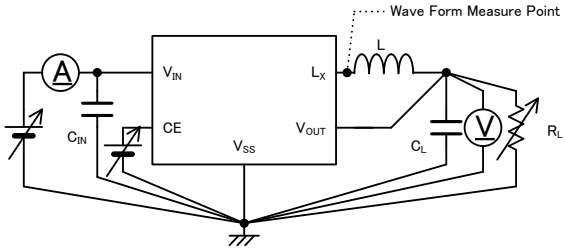

※ External Components

L : 4.7μH(NR4018)
C_{IN} : 4.7μF(ceramic)
C_L : 10μF(ceramic)

< Circuit No.2 >

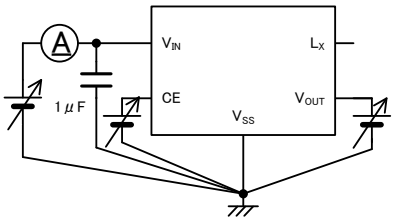

< Circuit No.3 >

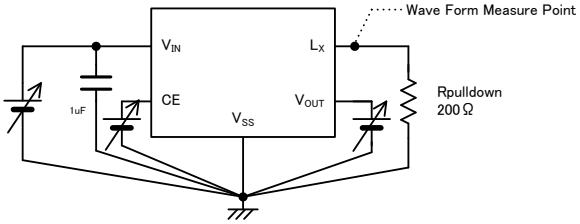

< Circuit No.4 >

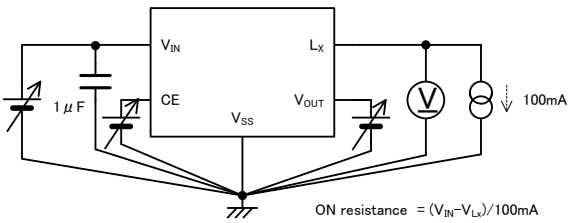

ON resistance = (V_{IN}-V_{Lx})/100mA

< Circuit No.5 >

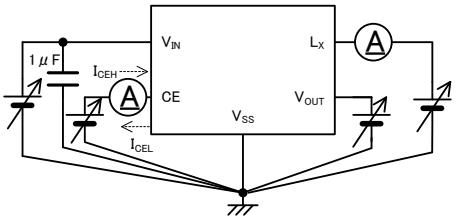

< Circuit No.6 >

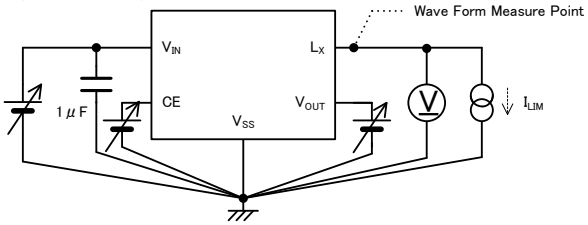

< Circuit No.7 >

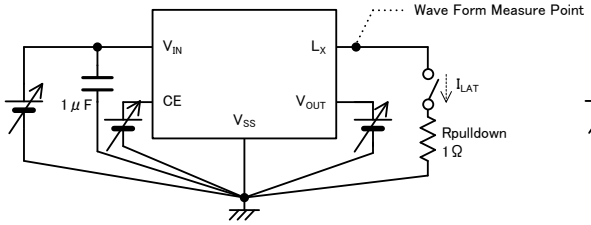

< Circuit No.8 >

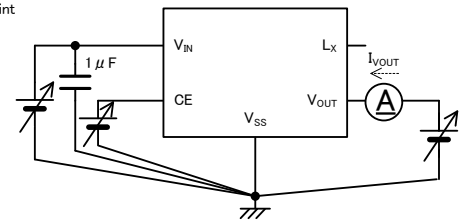

■TYPICAL PERFORMANCE CHARACTERISTICS

(1) Efficiency vs. Output Current (Compare to different coil)

XC9244A12C(V_{IN}=3.6V)

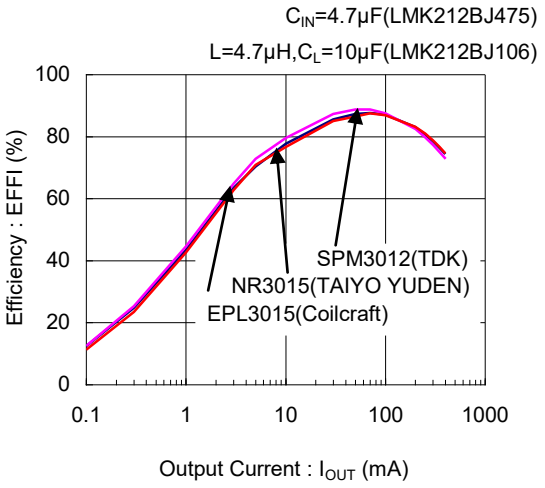

XC9245A12C(V_{IN}=3.6V)

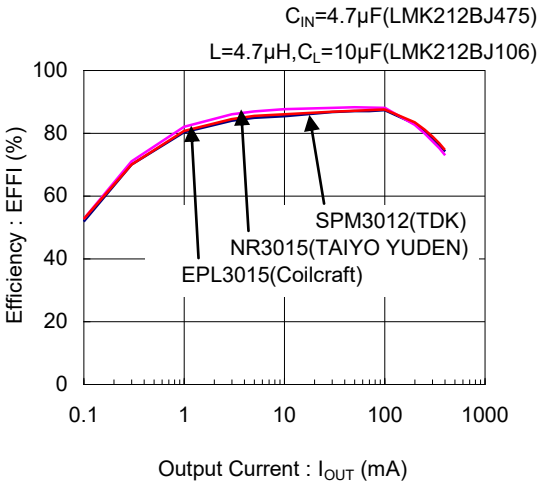

(1) Efficiency vs. Output Current

XC9244/XC9245A12C

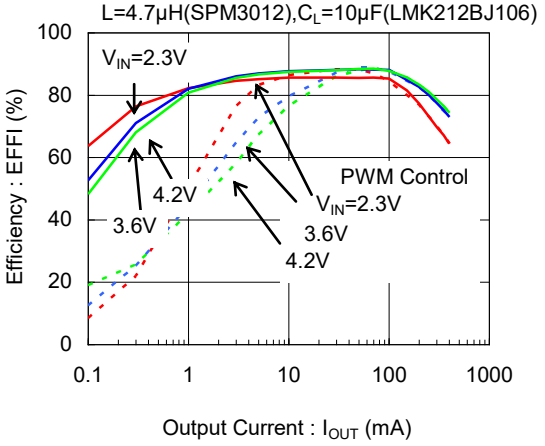

XC9244/XC9245A18C

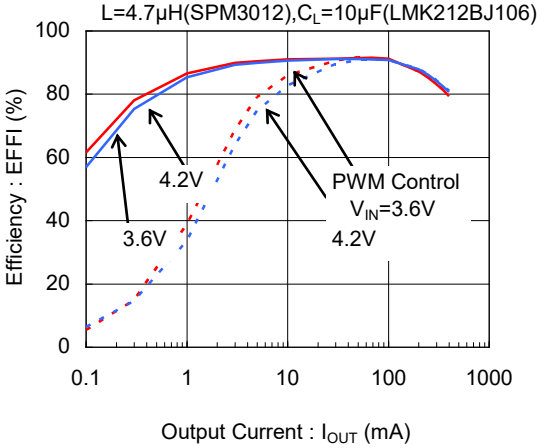

XC9244/XC9245A33C

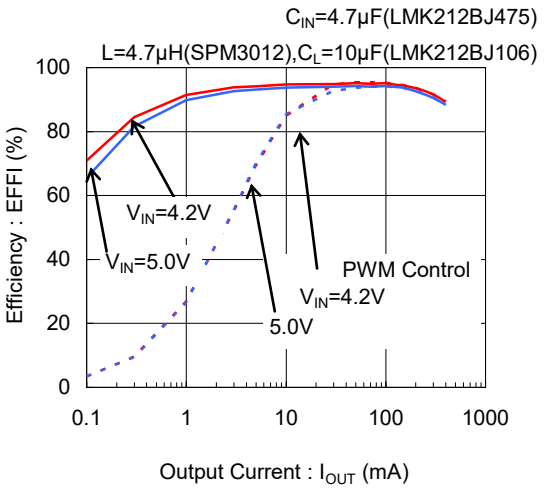

(2) Output Voltage vs. Output Current

XC9244/XC9245A12C

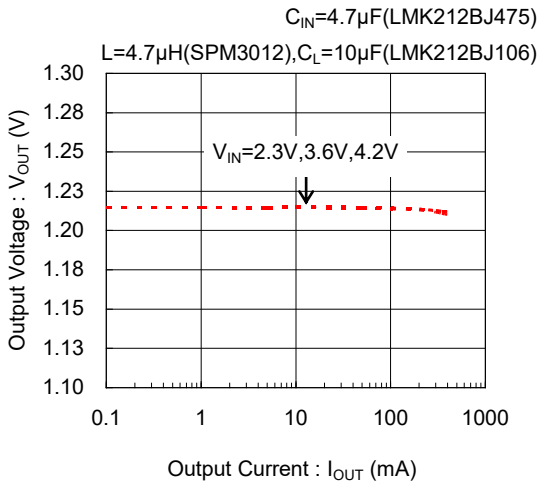

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(2) Output Voltage vs. Output Current (Continued)

XC9244/XC9245A18C

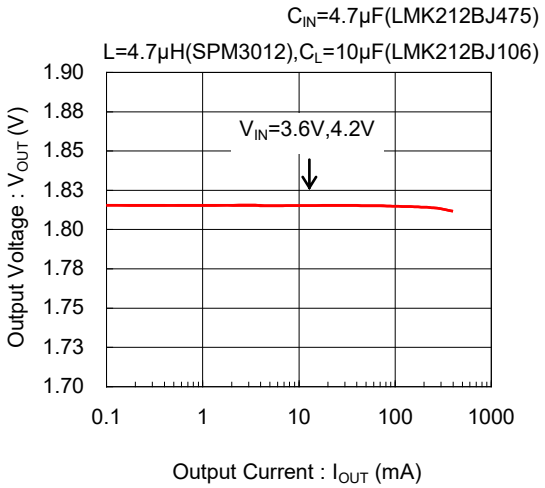

XC9244/XC9245A33C

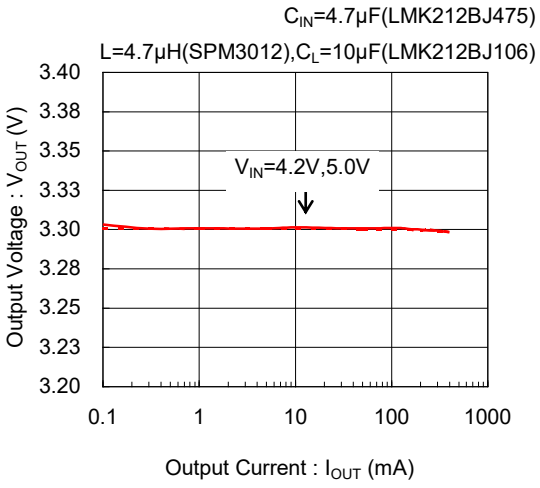

(3) Ripple Voltage vs. Output Current

XC9244/XC9245A12C

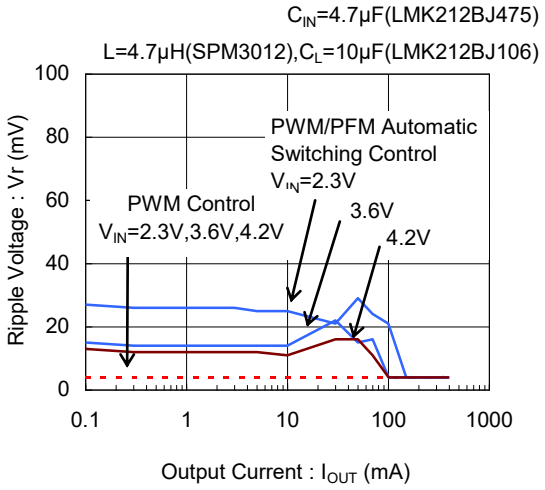

XC9244/XC9245A18C

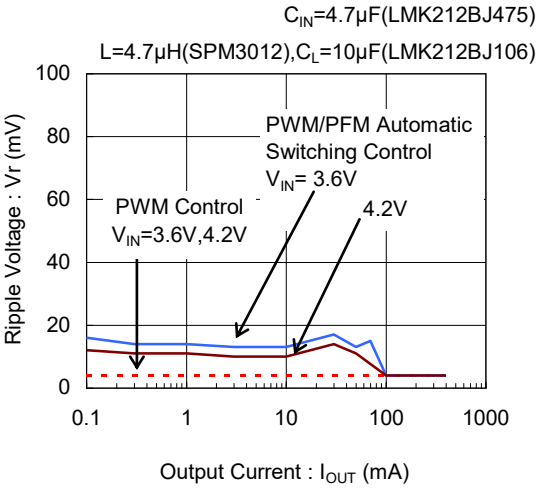

XC9244/XC9245A33C

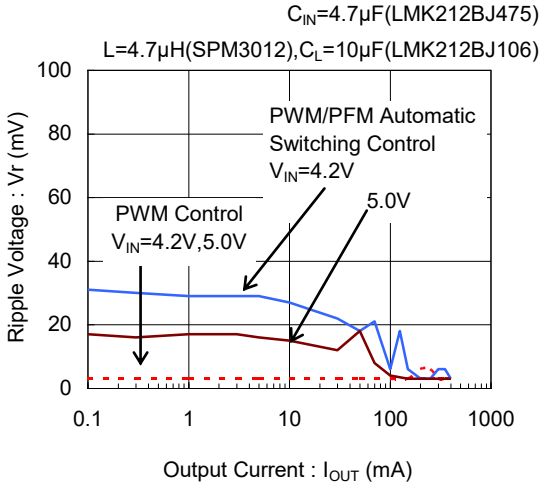

(4) Output Voltage vs. Ambient Temperature

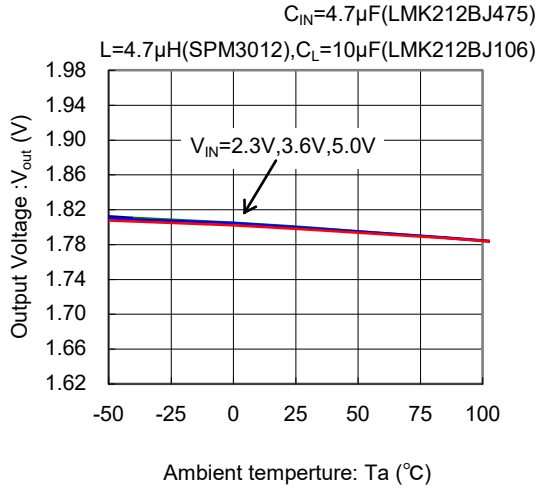

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(5) Oscillation Frequency vs. Ambient Temperature

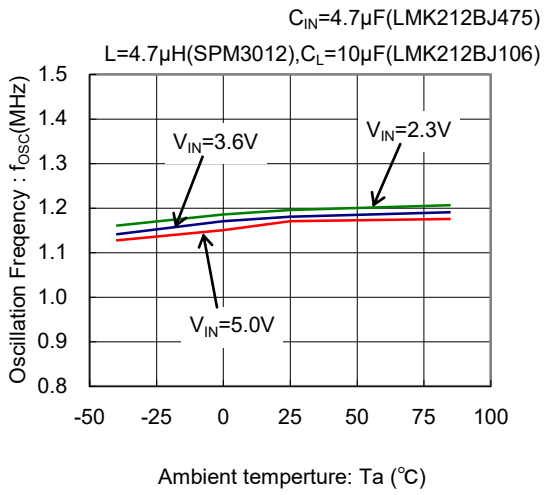

(6) Oscillation Frequency vs. Input Voltage

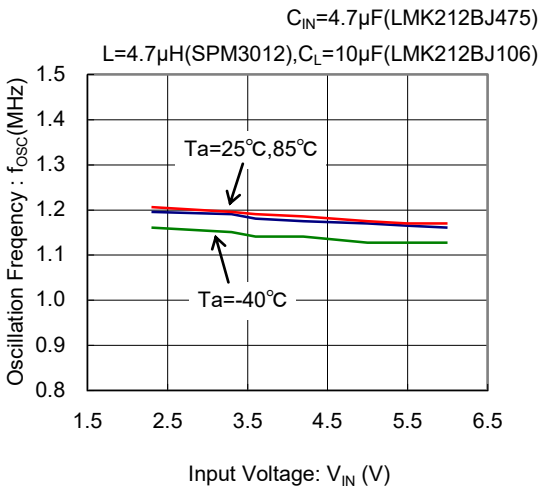

(7) Quiescent Current vs. Ambient Temperature

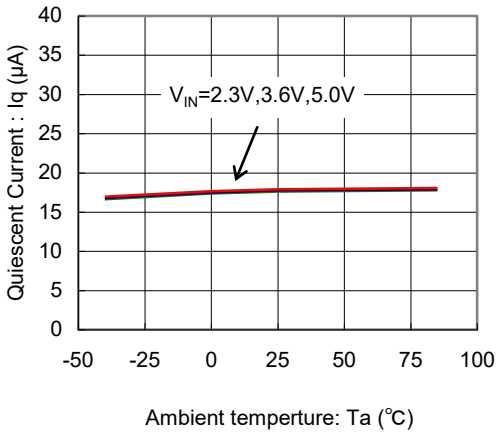

(8) Quiescent Current vs. Input Voltage

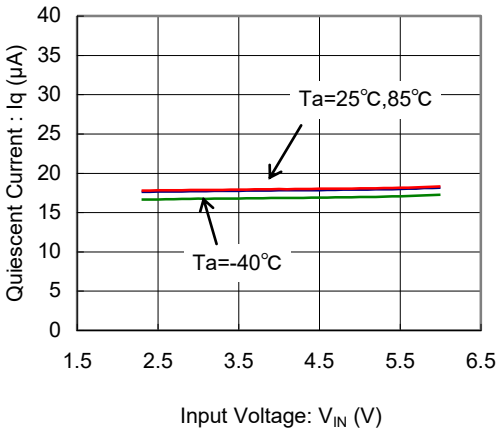

(9) CE "H" Voltage vs. Ambient Temperature

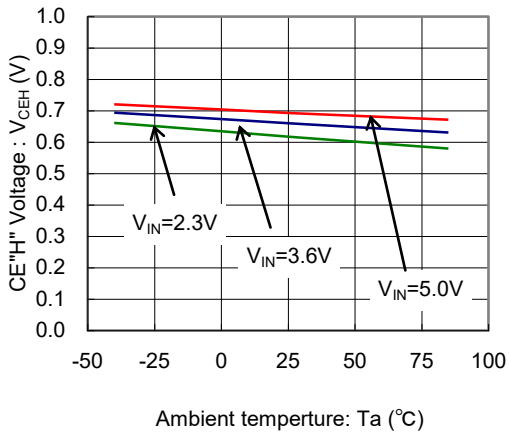

(10) CE "H" Voltage vs. Input Voltage

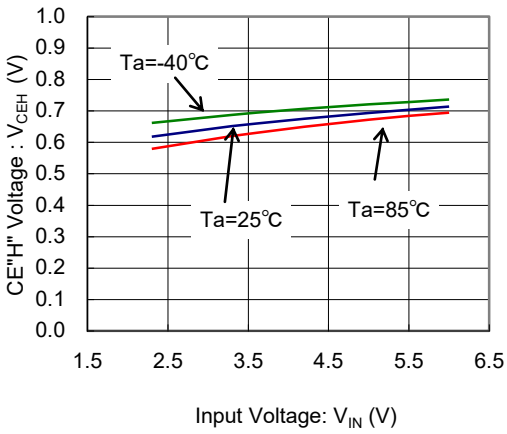

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(11) Lx SW "H" ON Resistance vs. Ambient Temperature

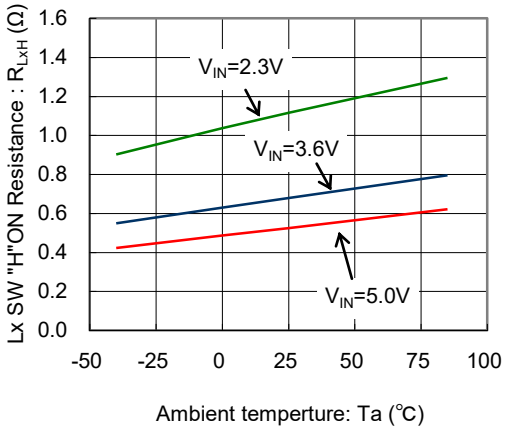

(12) Lx SW "H" ON Resistance vs. Input Voltage

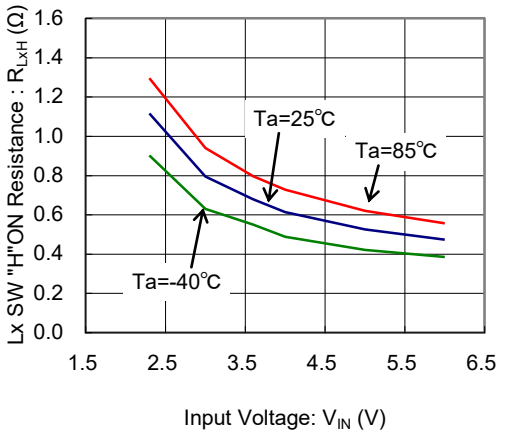

(13) Lx SW "L" ON Resistance vs. Ambient Temperature

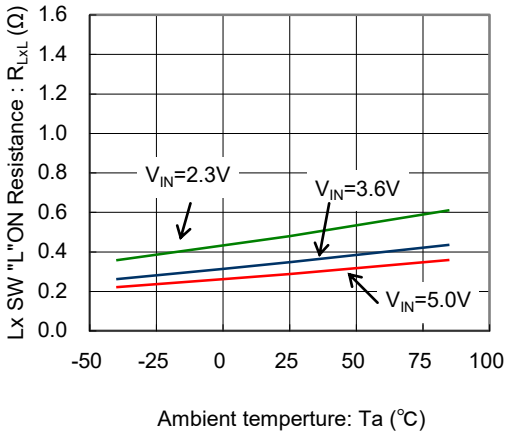

(14) Lx SW "L" ON Resistance vs. Input Voltage

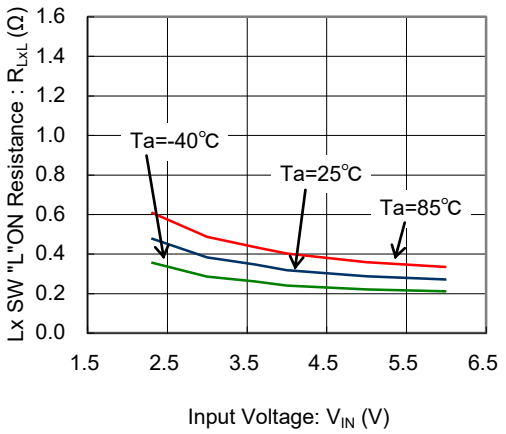

(15) C_L Discharge vs. Ambient Temperature

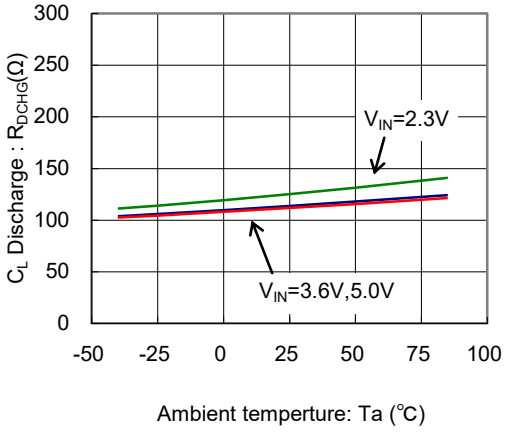

(16) C_L Discharge vs. Input Voltage

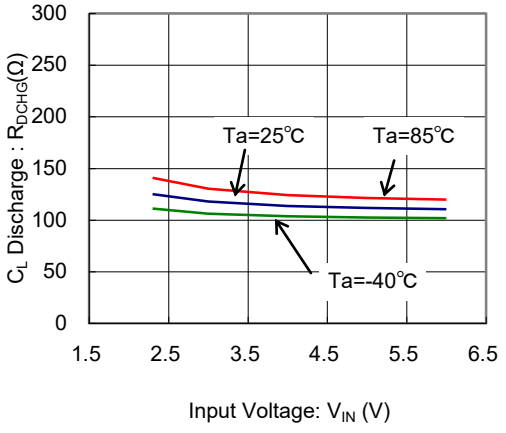

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(17) PFM Switch Current vs. Ambient Temperature

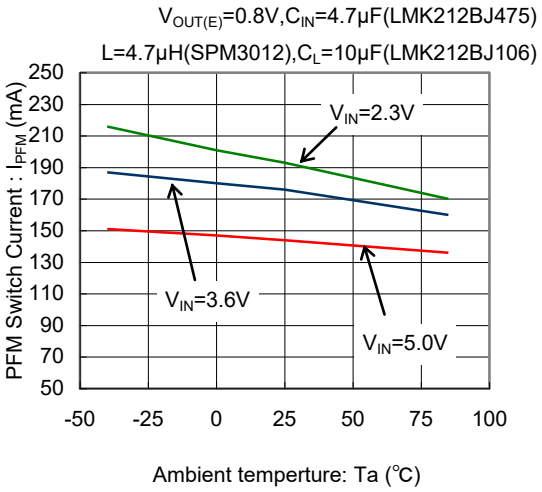

(18) PFM Switch Current vs. Input Voltage

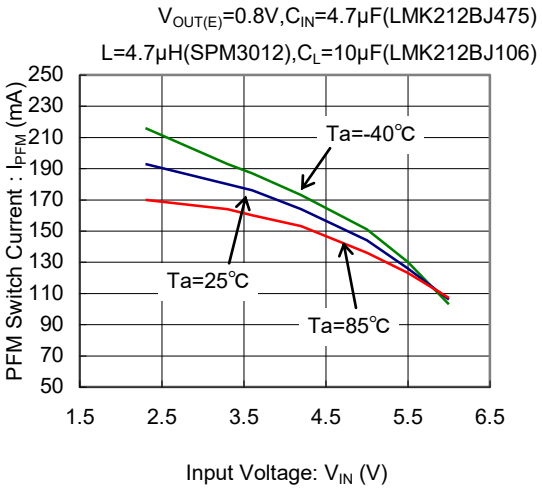

(19) Current Limit vs. Ambient Temperature

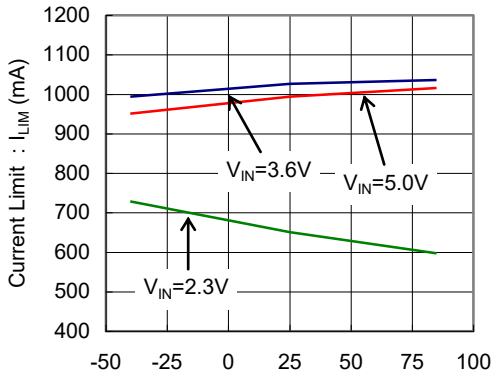

(20) Current Limit vs. Input Voltage

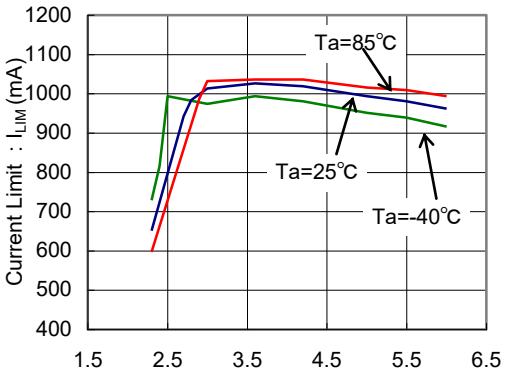

(21) UVLO Voltage vs. Ambient Temperature

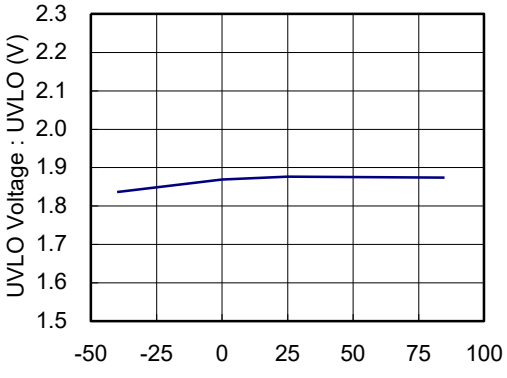

(22) Soft Start Time vs. Input Voltage

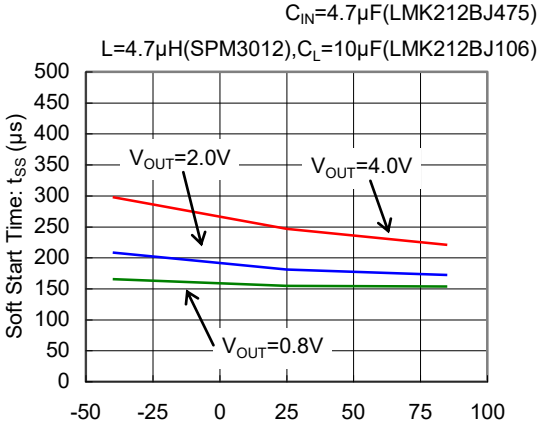

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(23) Rise Wave Form

XC9244/XC9245A12C

C_{IN}=4.7μF(LMK212BJ475)
L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

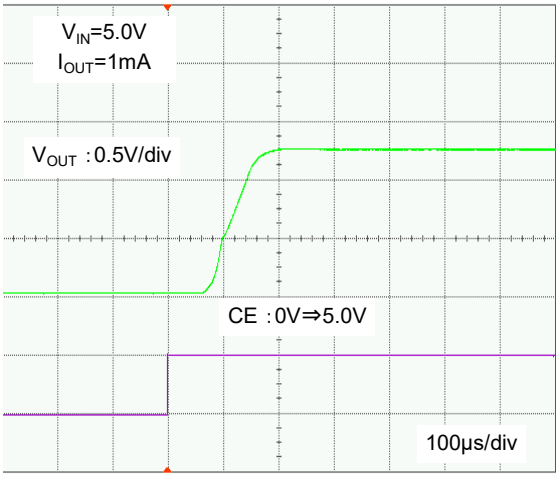

XC9244/XC9245A18C

C_{IN}=4.7μF(LMK212BJ475)
L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

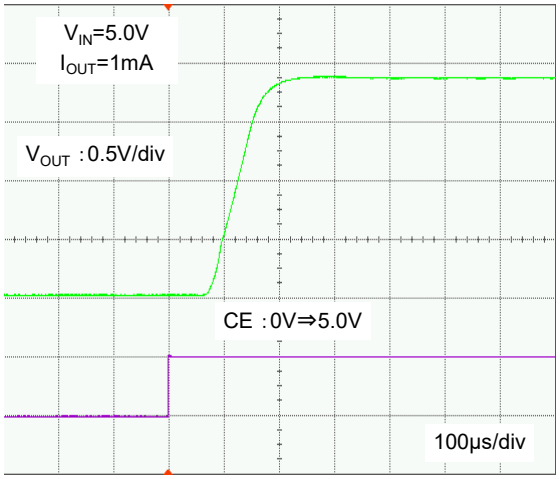

XC9244/XC9245A33C

C_{IN}=4.7μF(LMK212BJ475)
L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

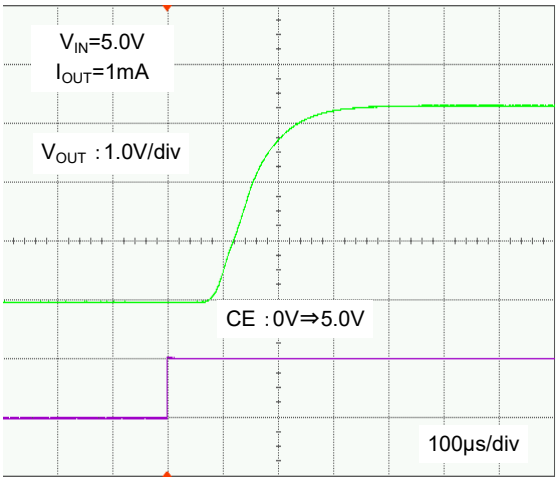

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(24) Load Transient Response

XC9244A18C

C_{IN}=4.7μF(LMK212BJ475)

L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

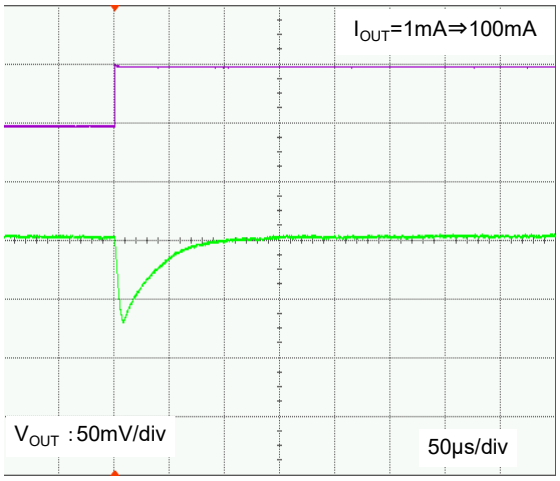

XC9244A18C

C_{IN}=4.7μF(LMK212BJ475)

L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

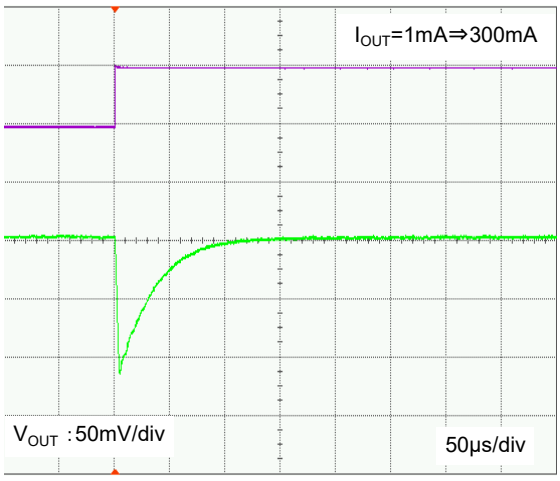

XC9244A18C

C_{IN}=4.7μF(LMK212BJ475)

L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

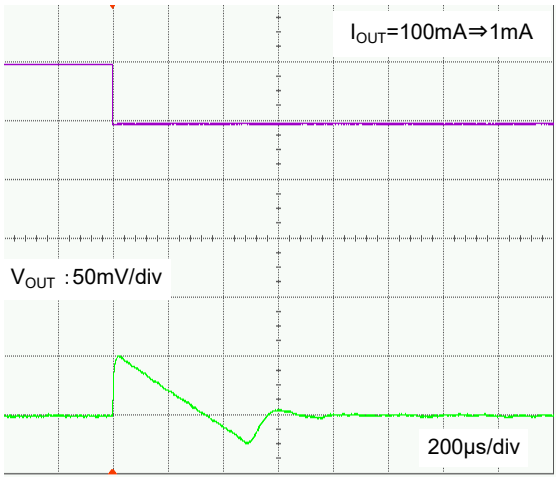

XC9244A18C

C_{IN}=4.7μF(LMK212BJ475)

L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

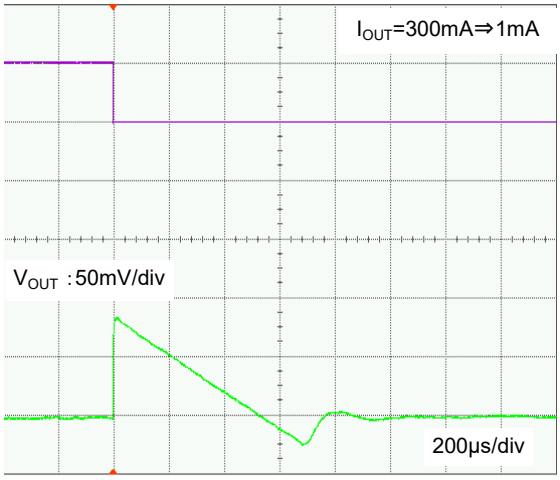

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(24) Load Transient Response (Continued)

XC9245A18C

C_{IN}=4.7μF(LMK212BJ475)

L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

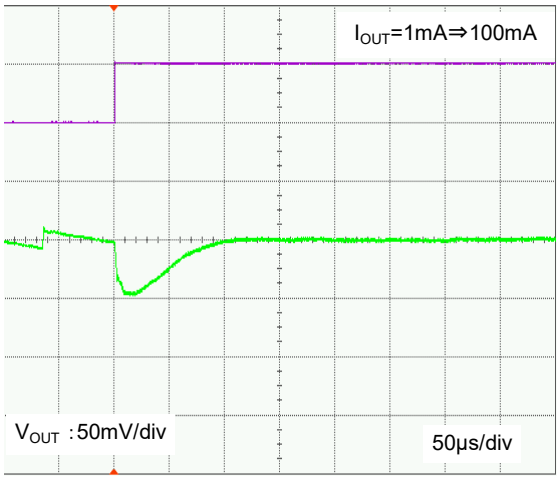

XC9245A18C

C_{IN}=4.7μF(LMK212BJ475)

L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

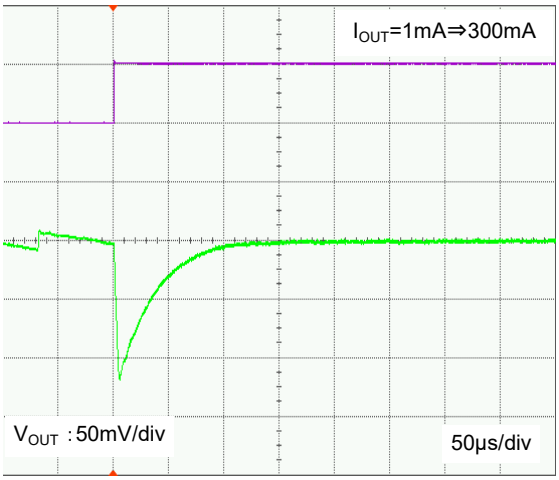

XC9245A18C

C_{IN}=4.7μF(LMK212BJ475)

L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

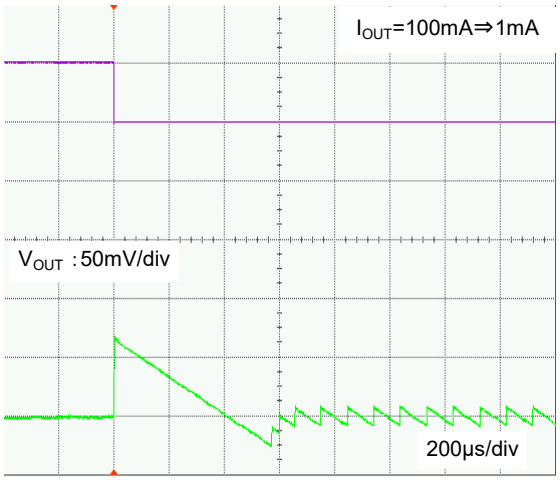

XC9245A18C

C_{IN}=4.7μF(LMK212BJ475)

L=4.7μH(SPM3012),C_L=10μF(LMK212BJ106)

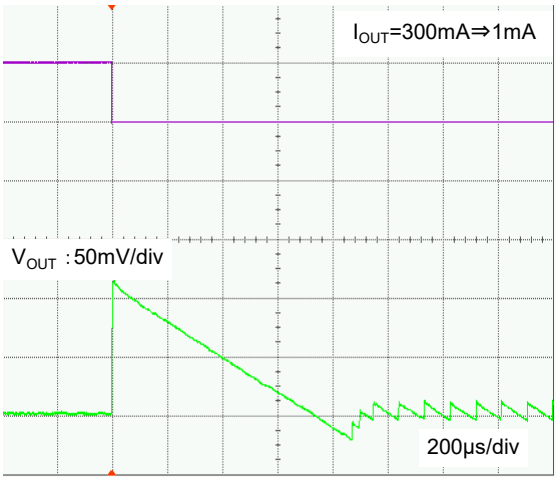

■PACKAGING INFORMATION

For the latest package information go to, www.torexsemi.com/technical-support/packages

PACKAGE	OUTLINE / LAND PATTERN	THERMAL CHARACTERISTICS
USPN-6	USPN-6 PKG	USPN-6 Power Dissipation

■MARKING RULE

●USPN-6



① represents product series and output voltage

XC9244 Series

MARK	OUTPUT VOLTAGE	VOLTAGE INCREMENT	PRODUCT SERIES
A	0.8~3.7	0.1	XC9244A08C**-G ~ XC9244A37C**-G
B	0.85~3.75	0.05	XC9244A0LC**-G ~ XC9244A3KC**-G
C	3.8~4.0	0.1	XC9244A38C**-G ~ XC9244A40C**-G
C	3.85~3.95	0.05	XC9244A3LC**-G ~ XC9244A3MC**-G

XC9245 Series

MARK	OUTPUT VOLTAGE	VOLTAGE INCREMENT	PRODUCT SERIES
D	0.8~3.7	0.1	XC9245A08C**-G ~ XC9245A37C**-G
E	0.85~3.75	0.05	XC9245A0LC**-G ~ XC9245A3KC**-G
F	3.8~4.0	0.1	XC9245A38C**-G ~ XC9245A40C**-G
F	3.85~3.95	0.05	XC9245A3LC**-G ~ XC9245A3MC**-G

② represents product function

MARK	OUTPUT VOLTAGE				MARK	OUTPUT VOLTAGE	
0	0.8	0.85			F	2.3	2.35
1	0.9	0.95			H	2.4	2.45
2	1.0	1.05			K	2.5	2.55
3	1.1	1.15			L	2.6	2.65
4	1.2	1.25			M	2.7	2.75
5	1.3	1.35			N	2.8	2.85
6	1.4	1.45			P	2.9	2.95
7	1.5	1.55			R	3.0	3.05
8	1.6	1.65			S	3.1	3.15
9	1.7	1.75			T	3.2	3.25
A	1.8	1.85	3.8		U	3.3	3.35
B	1.9	1.95	3.9		V	3.4	3.45
C	2.0	2.05	4.0		X	3.5	3.55
D	2.1	2.15		3.85	Y	3.6	3.65
E	0.8	0.85		3.95	Z	3.7	3.75

③④ represents production lot number

01 to 09, 0A to 0Z, 11 to 9Z, AA to AZ, B1 to ZZ repeated.

(G, I, J, O, Q, W excluded)

*No character inversion used.

1. The product and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.

2. The information in this datasheet is intended to illustrate the operation and characteristics of our products. We neither make warranties or representations with respect to the accuracy or completeness of the information contained in this datasheet nor grant any license to any intellectual property rights of ours or any third party concerning with the information in this datasheet.

3. Applicable export control laws and regulations should be complied and the procedures required by such laws and regulations should also be followed, when the product or any information contained in this datasheet is exported.

4. The product is neither intended nor warranted for use in equipment of systems which require extremely high levels of quality and/or reliability and/or a malfunction or failure which may cause loss of human life, bodily injury, serious property damage including but not limited to devices or equipment used in 1) nuclear facilities, 2) aerospace industry, 3) medical facilities, 4) automobile industry and other transportation industry and 5) safety devices and safety equipment to control combustions and explosions. Do not use the product for the above use unless agreed by us in writing in advance.

5. Although we make continuous efforts to improve the quality and reliability of our products; nevertheless Semiconductors are likely to fail with a certain probability. So in order to prevent personal injury and/or property damage resulting from such failure, customers are required to incorporate adequate safety measures in their designs, such as system fail safes, redundancy and fire prevention features.

6. Our products are not designed to be Radiation-resistant.

7. Please use the product listed in this datasheet within the specified ranges.

8. We assume no responsibility for damage or loss due to abnormal use.

9. All rights reserved. No part of this datasheet may be copied or reproduced unless agreed by Torex Semiconductor Ltd in writing in advance.

TOREX SEMICONDUCTOR LTD.